


FRESH AND FROZEN 1ST FLOOR

GENERAL
 1. All dimensions to be checked on site before commencement of any work. Use figured dimensions only. Any discrepancies should be reported to the Architect immediately.
 2. All dimensions are in millimetres unless otherwise specified.

- FINISHES**
1. FLOOR
 1a - 3mm Epoxy Floor Finish
 1b - 40mm thick Screed finished smooth
 1c - 300 x 300 non-slip ceramic Tiles
 1d - Approved granite tiles on screed
2. WALLS
 2a - Epoxy Ester Paint
 2b - Water Proofing Textured Paint
 2c - Wood Float Plaster
 2d - 1200x600mm Approved Ceramic Tiles
 2e - Stainless Steel Wall Fabrication
 2f - PU Panels Wall.
3. CEILING
 3a - Painted Plasted Slab
 3b - White 2 Pack Epoxy Paint.
 3c - PU Panels.
4. SKIRTING
 4a - 150 x 20 mm Ceramic Tiles
 4b - 150mm high 25mm painted cement screed
 4c - Stainless Steel Wall Fabrication

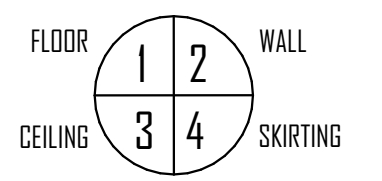

REVISIONS:

NO.	DESCRIPTION

PROJECT:
**PROPOSED HACCP
 COMPLIANT ULTRA
 MODERN TUNA FISH HUB
 AT LIWATONI,
 MOMBASA COUNTY**

DRAWING TITLE:
RENOVATION DRAWING

CLIENT DEPARTMENT:
**STATE DEPARTMENT FOR
 FISHERIES, AQUACULTURE
 AND THE BLUE ECONOMY**

CLIENT'S SIGNATURE:

SCALE: 1:200
 PROJECT JOB NO.: MOALF&C/SDF&BE/4 /21/22
 DRAWING NO.: **370**

NAME	SIGNED	DATE
DRAWN: ERIC KANYINGI		
ARCHITECT: S.K. MULU		

APPROVED:
ARCH L MOCHAMA
 AG. CHIEF ARCHITECT

